

Configure your Blazing Hog Modem - New T-Mobile

The new T-Mobile SIM card needs to be set up with a static IP address. These instructions will walk you through the process step by step.

You should watch the following videos before attempting the change over:

www.blazinghog.com/sim-card-installation

Blazing Hog Modem - How to change the SIM CARD

T-Mobile set up video

This process should activate your modem.

The SIM card in the modem will be active until Nov 23rd. If this process does not work, you will simply factory reset the modem and put the old card back inside.


If it fails to work you can request to activate the card at the above web page.

If you don't have the new T-Mobile card we sent please click Request SIM Card on the same web page and we will send a new card.

Please NOTE - The web links in the email we sent you already have all your information linked to your request. The process will be easier and faster if you click on the links from the email.

Sim Replacement Instruction Video - BlazingHog.com/sim-card-installation

Your Blazing Hog modem takes a micro sim card.

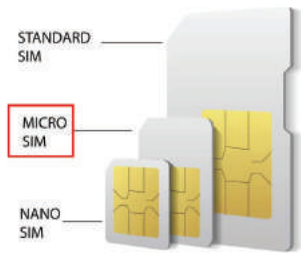

T-Mobile pop out Micro size.

If you accidentally pop out the nano size it will snap back into the Micro frame.

Please watch video first

1



UNPLUG the MODEM

Remove SIM door on bottom of modem.

IF the silver gate comes loose.

Align the card in the recessed spot.

Lay the gate on top.


Slide gate up to lock in place.

2



Lay the modem flat with the SIM door opening nearest you.

3




Using your finger. Slide the metal bracket toward you. You will feel a click.

4



Open the SIM card door by lifting the far edge. It will swing toward you. Note the position of the old sim.

5

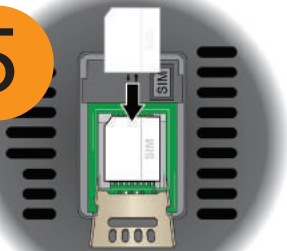


Carefully slide the NEW micro SIM into the metal slot.

6



Close the metal SIM card door

7



Lock the SIM door by sliding it upward.

8. Replace the Black SIM card cover 9. Plug in modem.

Watch the video first. After replacing the card you will need to configure the modem.

You will need to log into your modem to configure the new settings. You will need to be connected to the modem via a computer, phone, or Smart TV.


Using a computer or SmartTV you will open a web browser like, Internet Explorer, Chrome, Firefox or Safari.

Using a phone you should download the Netgear Mobile App

There are multiple Netgear Apps on available for your phone you want the Netgear Mobile with this logo.





When you open your browser you will see this page.

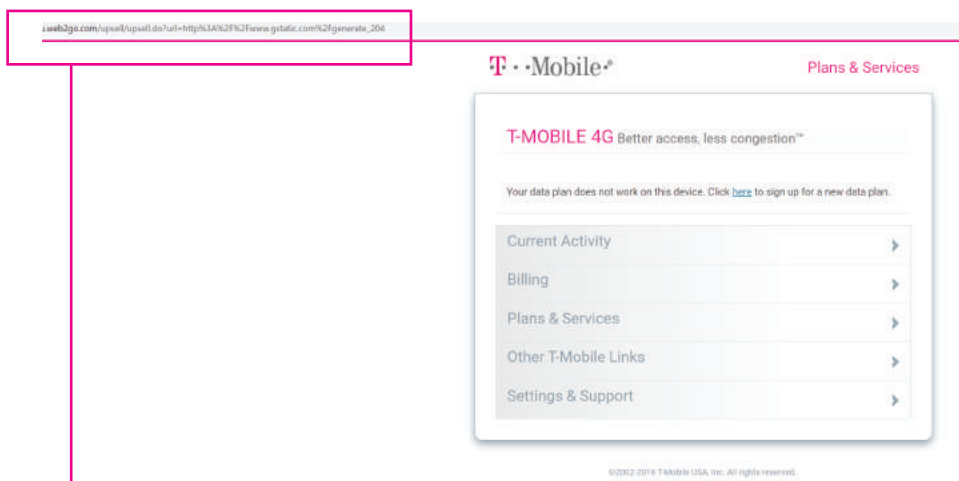

replace this address with: 192.168.5.1



Sign in with password on back of modem

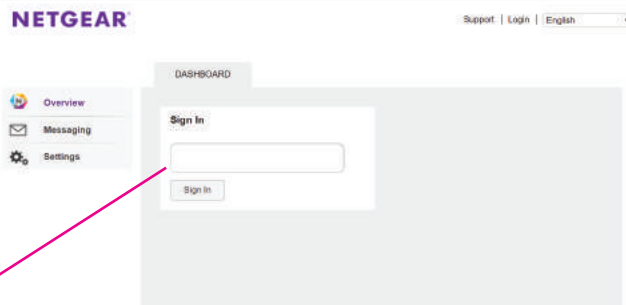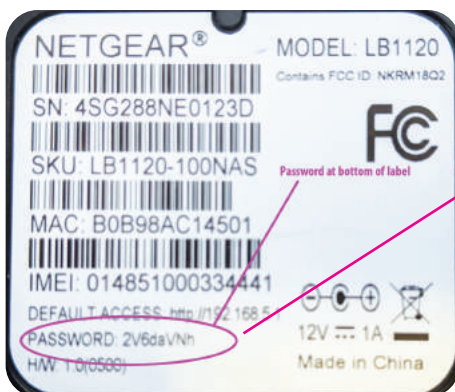

When logging into the modem you will be on this page.


The screenshot shows the Netgear modem dashboard. At the top left is the **NETGEAR** logo. At the top right are links for [Support](#), [About](#), [Logout](#), and a language dropdown menu set to **English**. Below the logo is a sidebar with three main menu items: **Overview** (with a gear icon), **Messaging** (with an envelope icon), and **Settings** (with a gear icon). Below these is a status bar showing **T-Mobile 4G** with signal strength and data icons, and a green checkmark indicating **Internet Connected** with a **Disconnect** link. The main content area is titled **DASHBOARD** and features a **Monthly LTE Usage** section. It displays **0.00 GB USED** and **21 DAYS REMAINING**. A note below states: *Displayed data usage is intended to help manage usage. The amounts shown are approximate and may vary.* Below the usage section are two settings: **Billing start date** set to **Day 1 each month** with a **Reset** button, and **Plan Limit** with an empty input field and a **MB** dropdown menu.

Click on Settings - three tabs will appear


Then click on Mobile - a sub menu will appear

Then Click on APN - then click details

This screenshot shows the **Settings** page of the Netgear modem. The **NETGEAR** logo and navigation links ([Support](#), [About](#), [Logout](#), **English**) are at the top. The sidebar on the left has **Settings** circled in pink. The main content area has three tabs: **GENERAL**, **MOBILE** (circled in pink), and **ADVANCED**. Under the **MOBILE** tab, there are sub-tabs: **Preferences**, **APN** (circled in pink), **SM Security**, and **Status Details**. The **APN** sub-tab is active, showing an **Active** section with a blue checkmark and the text **T Mobile (fast.t-mobile.com)**. To the right of this text is a **Details** button with a dropdown arrow, which is also circled in pink. Below this is an **Add** button.

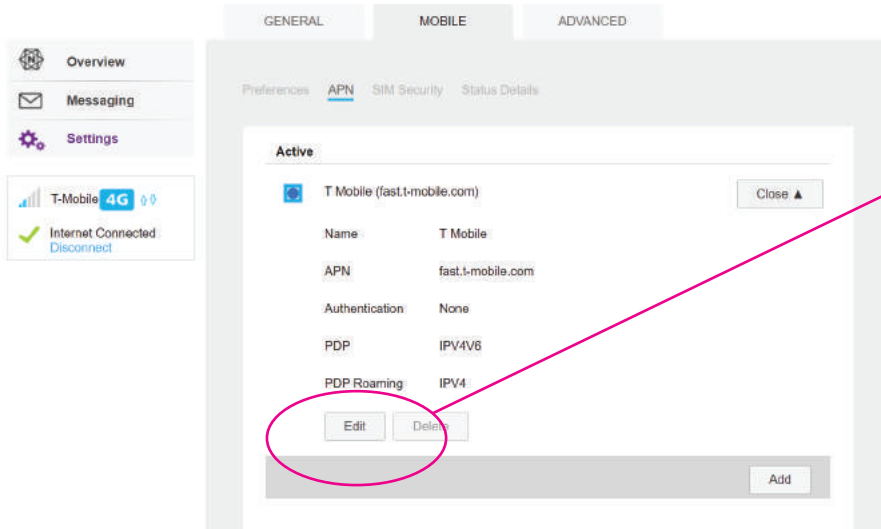

Click Edit

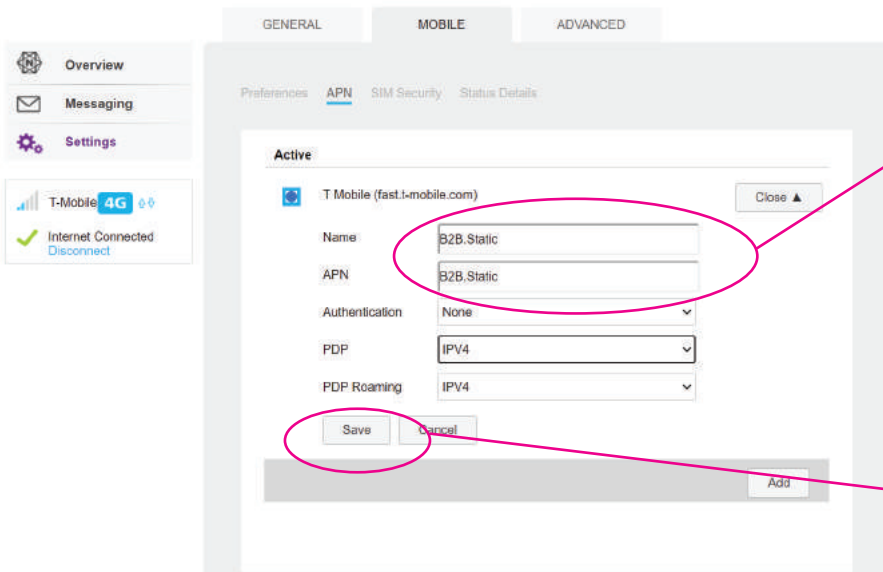


Change Name to:

B2B.Static

Change APN to:

B2B.Static

Click Save

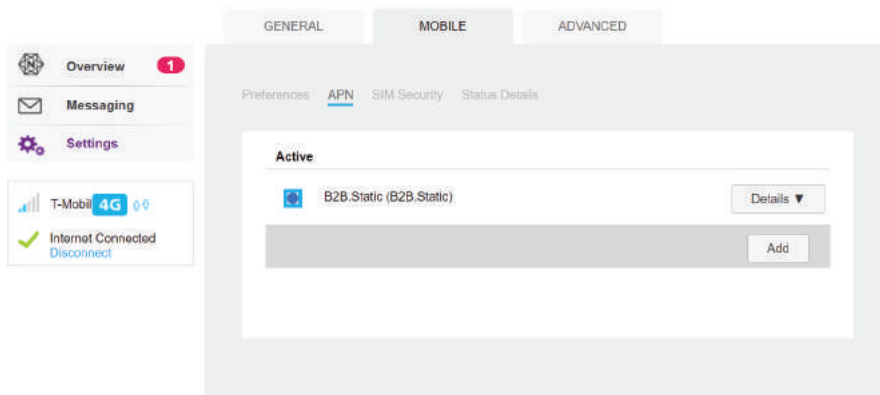

Please allow 3 minutes for your modem to reconnect to the internet.

If your power light stays orange please try setting the APN again.

If it is still orange after the second attempt the SIM card is not active.

Please follow the link in your email to activate the sim card.

Please install your new Blazing Hog Sim Card. For details on installation, we have added instructional videos to watch on our Sim Card Activation Page.


To complete installation, please enter your Account Number [SR#] and your new Sim Card Number at the following link:

- [Activate Sim Card](#)

If you do not have a Blazing Hog Sim Card, please click on the following link:

- [Request Sim Card](#)

Thank you

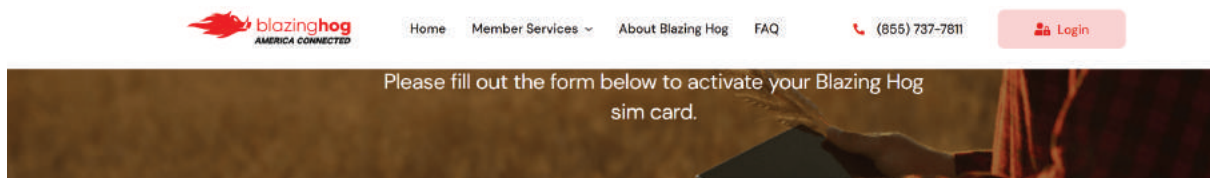

Install Sim Card

Sim Card Carrier AT&T T-Mobile Verizon Wireless Cellular Plus

SR9412

Put in the sim card number of the NEW card.

Confirm the number

Click Activate SIM

We will text and email you when the card has been activated.